


HN series

SPECIFICATIONS:

3-JAW EXTRA HIGH SPEED THROUGH-HOLE POWER CHUCK (WITH ADAPTOR)

1. Possible 10,000 r.p.m.highest speed chcuK.
2. Model HN chucks are assembled with adaptor for ASA B5.9 type A spindles.
3. Model HN chucks are manufactured form high grade alloy steel, All sliding surfaces are hardened and ground for accurate actual running and long service repeatability.

GRIPPING CHARACTERISTIC GRAPH

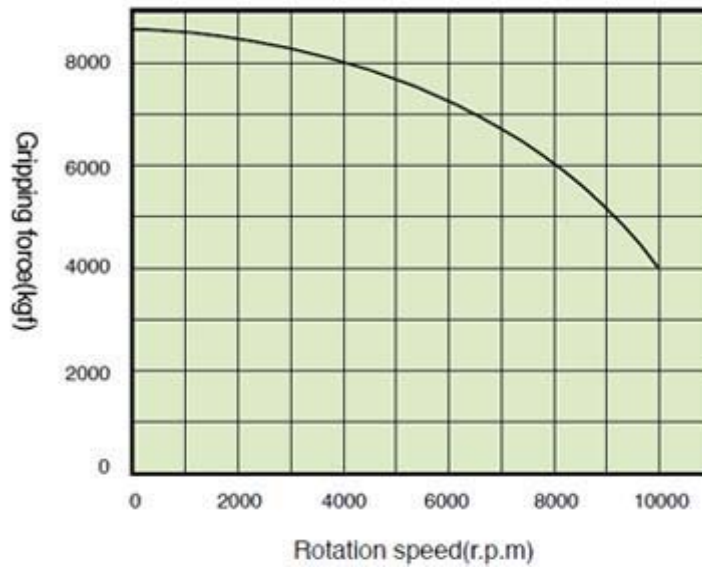

SPECIFICATIONS:

Model	Through- Hole(mm)	Plunger Stroke (mm)	Jaw Stroke (in dia) (mm)	Max.Draw Bar Pull Force KN (kgf)	Max.Gripping Force KN (kgf)	Max.Operating Pressure KN (kgf/cm2)	Max. Speed (r.p.m.)	Weight (Kg)	Moment of Inertia I (kg. m2)	Matching Cylinder	Matching Soft Jaw	Gripping O.D.Range (mm)
HN-06	Ø36	12	5.5	30(3050)	79.4(8100)	2.9(30)	10000	11.5	0.035	HG-1336	Model-A	Ø14-Ø51