


NHT series



SPECIFICATIONS:

2 JAWS AND 3 JAWS THROUGH HOLE POWER CHUCKS (WITH ADAPTOR)

1. Gripping of round or irregular workpiece does not need to change the chuck.
2. The chucks are designed according to ASA B5.9 type A spindle.
3. The chucks are made from high grade alloy steel. All siding surfaces are hardened and ground for increased running accuracy and longer service life.

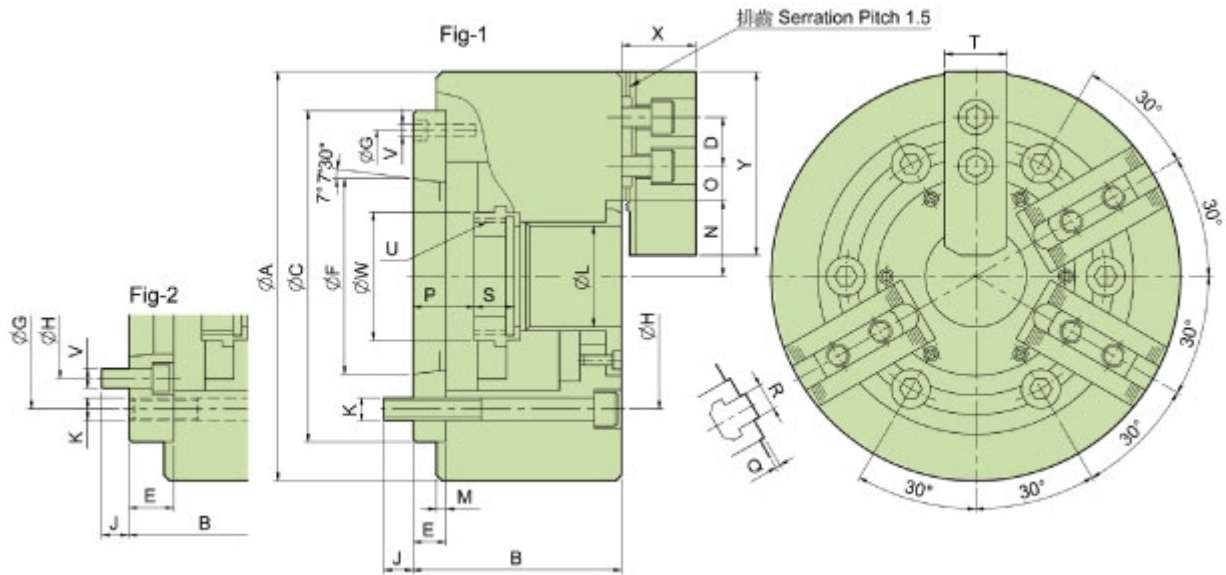

SPECIFICATIONS:

Model	Dim Through-Hole (mm)	Plunger Stroke (mm)	Jaw Stroke(in dia) (mm)	Max. Draw Bar Pull Force (kgf)		Max. Gripping Force (kgf)		Max. Operating Pressure (kgf/cm ²)		Max. Speed(r.p.m.)	Weight (kg)	Malching Cylnder	Malching Soft Jaw	Malching Hard Jaw
				3 Jaw	2 Jaw	3 Jaw	2 Jaw	3 Jaw	2 Jaw					
NHT208A5	52	16	7.4	2243	1495	5812	3875	17.2	12.1	3500	25.5	M1552	HC06	HJ06
NHT208A6	52	16	7.4	2243	1495	5812	3875	17.2	12.1	3500	24.7	M1552	HC06	HJ06

DIMENSIONS:

Dim Model	A	B	C	D	E	F	G	H	J	K	L	M	N max.	O max.	O min.	P max.	P min.	Q	R	S	T	U max.	V	W	X	Y	Re-ference
NHT-208A5	210	113	170	20	23	82.563	133.5	104.78	13	6XM12	52	5	41.8	34	7.5	37.5	21.5	2	12	20.5	32	M60XP2.0	6XM10	66	37	73	Fig-2
NHT-208A6	210	107	170	20	17	106.375	150	133.35	17	6XM12	52	5	41.8	34	7.5	31.5	15.5	2	12	20.5	32	M60XP2.0	3XM6	66	37	73	Fig-1