


## SIC series



### SPECIFICATIONS:

#### 4-JAW SCROLL CHUCK PLAIN BACK, SOLID JAW.

1. Gripping of square or octagonal workpieces could fit into central line automatically.
2. SIC have high stability in gripping thin tube work piece.
3. The specification is the same as SC type.
4. The body is made of MRRHANITE. It is suitably used for high speed revolution and 3 times more durable than regular chucks.

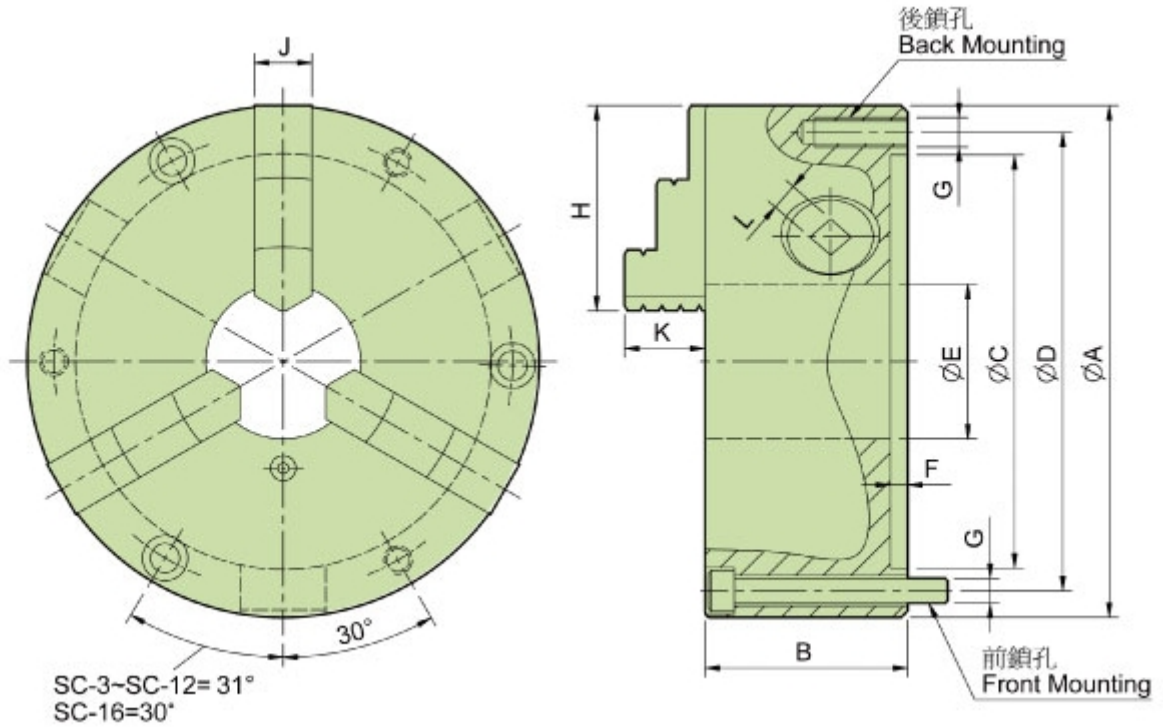

### SPECIFICATIONS:

Model	Dim							G		H	J	K	L	Allowable Hand Torque (kgf·m)	Gripping Force (kgf)	Moment of Inertia I (kg·m <sup>2</sup> )	Weight (kg)	Max. Speed (r.p.m.)	Gripping Rang	
	A	B	C	D	E	F	Back	Front	O.D. range										I. D. range	
SIC-7	192	76.5	155	172	58	5.5	3-M10	3-M10X80	77	21.5	29.4	11	11.0	3600	0.06	14.8	3500	Ø4-Ø180	Ø56-Ø170	
SIC-9	232	84	190	210	70	6	3-M12	3-M12X90	87	24	35.6	12	15.0	3900	0.16	23.2	2900	Ø5-Ø220	Ø62-Ø210	
SIC-12	310	96	260	285	105	7	3-M12	3-M12X110	110	30	45.6	14	21.0	5100	0.58	47	2200	Ø10-Ø300	Ø86-Ø290	
SIC-16	405	122	345	375	160	8.7	-	6-M14X130	146	42	56.3	15	23.0	4500	1.72	107	1500	Ø30-Ø380	Ø110-Ø360	