


SK series



SPECIFICATIONS:

3-JAW STRONG SCROLL CHUCK PLAIN BACK, 2-PIECE JAWS.

1. SK types chucks have wider utilization range; hard jaws suitable for heavy cutting; soft jaws suitable for light and precision cutting.
2. Hard jaws could be used as internal jaws and external jaws.
3. Gripping accuracy of 0.03mm (0.012 inch) T.I.R.
4. The body is made of MEEHANITE. It is suitably used for high speed revolution and 3 times more durable than regular chucks.

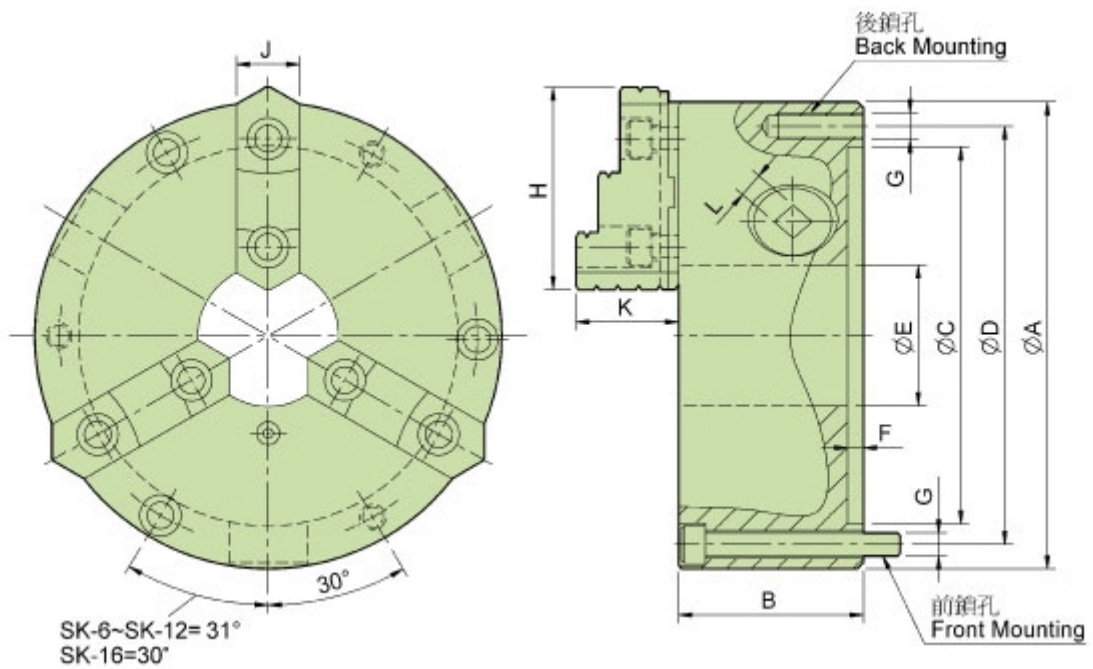

SPECIFICATIONS:

Model	Dim						G		H	J	K	L	Allowable Hand Torque (kgf·m)	Gripping Force (kgf)	Moment of Inertia I (kg·m ²)	Weight (kg)	Max. Speed (r.p.m.)	Gripping Rang	
	A	B	C	D	E	F	Back	Front										O.D. range	I. D. range
SK-6	167	67	130	147	45	5.5	3-M10	3-M10x70	72	26	40.2	10	9.0	3300	0.03	9	4000	Ø4-Ø160	Ø55-Ø150
SK-7	192	76.5	155	172	58	5.5	3-M10	3-M10x80	81.2	28	42	11	11.0	3600	0.06	13.8	2900	Ø8-Ø180	Ø62-Ø170
SK-8	200	76.5	160	176	58	5.5	3-M10	3-M10x80	82	28	42	11	11.0	3600	0.07	15.5	3200	Ø8-Ø190	Ø68-Ø180
SK-9	232	84	190	210	70	6	3-M12	3-M12x90	90.9	32	51.2	12	15.0	3900	0.16	22	2900	Ø11-Ø220	Ø70-Ø210
SK-10	273	87	230	250	89	8	3-M12	3-M12x90	100.5	35	56.7	12	19.5	4800	0.26	29.7	2500	Ø12-Ø260	Ø80-Ø250
SK-12	310	96	260	285	105	7	3-M12	3-M12x110	114.5	40	56.8	14	21.0	5100	0.58	43.5	2200	Ø15-Ø300	Ø110-Ø360
SK-16	405	122	345	375	160	8.7	-	6-M14x130	148.6	50	76.1	15	23.0	4500	1.72	98	1500	Ø30-Ø380	Ø110-Ø360