


SIK series



SPECIFICATIONS:

4-JAW STRONG SCROLL CHUCK PLAIN BACK, 2-PIECE JAWS.

1. Hard jaws are adopted for square for square or octagonal thin tube workpieces machining.
2. Soft jaws could grip rectangular workpiece after being unisotropic machined.
3. The specification is the same as SK type.
4. The body is made of MEEHANITE. It is suitably used for high speed revolution and 3 times more durable than regular chucks.

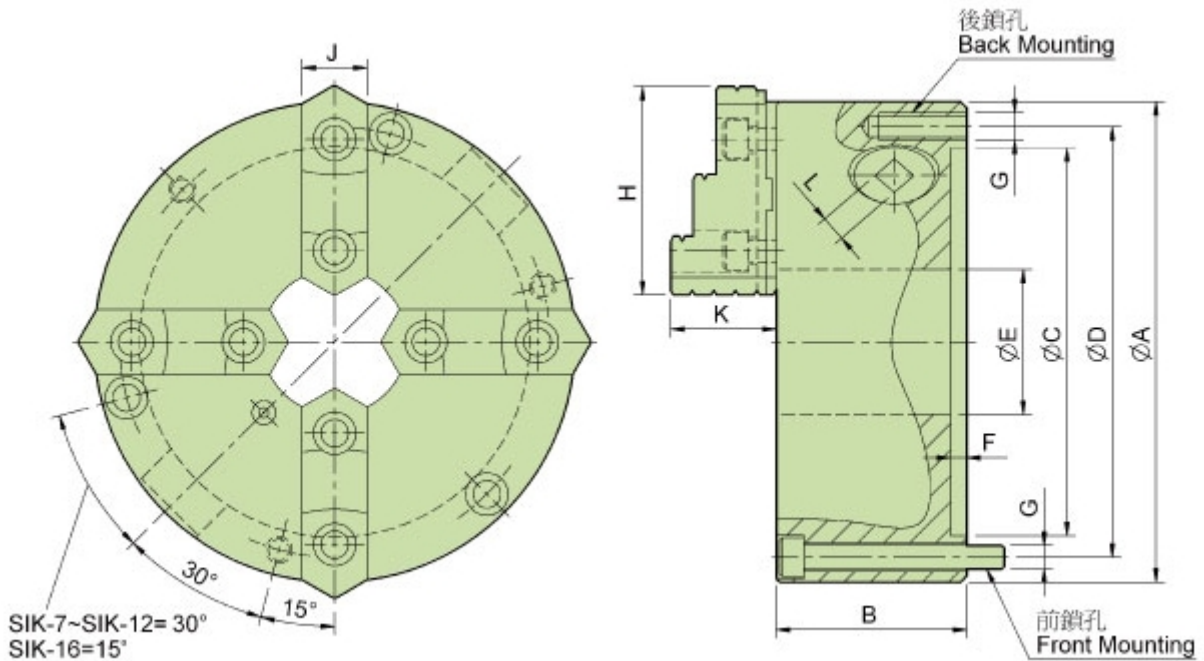

SPECIFICATIONS:

Dim Model	A	B	C	D	E	F	G		H	J	K	L	Allowable Hand Torque (kgf·m)	Gripping Force (kgf)	Moment of Inertia I (kg·m ²)	Weight (kg)	Max. Speed (r.p.m.)	Gripping Rang	
							Back	Front										O.D. range	I. D. range
SIK-7	192	76.5	155	172	58	5.5	3-M10	3-M10X80	82	28	42	11	11.0	3600	0.06	14.1	3500	Ø8-Ø180	Ø62-Ø170
SIK-9	232	84	190	210	70	6	3-M12	3-M12X90	96	32	51.2	12	15.0	3900	0.16	22.2	2900	Ø11-Ø220	Ø70-Ø210
SIK-12	310	96	260	285	105	7	3-M12	3-M12X110	114.5	40	56.8	14	21.0	5100	0.58	45	2200	Ø5-Ø300	Ø90-Ø290
SIK-16	405	122	345	375	160	8.7	-	6-M14x130	148.6	50	76.1	15	23.0	4500	1.72	108	1500	Ø30-Ø380	Ø110-Ø360